

HOTEL DISPENSER Model CHD22 /CHD30 Service Parts Manual





Publication Number: 631806054 Revision Date: October 6, 2008

Revision: B

Visit the IMI Cornelius web site at www.cornelius.com for all your Literature needs.

This is the list of service parts and wiring diagrams for all versions of these two hotel dispensers.

Pay close attention to the voltage and/or cycles to be sure of ordering the correct part.

Table of Contents


| Front and Top Panels · · · · · · · · · · · · · Pag | ge 2 |
|--|-------|
| CHD30 & CHD22 Front Panel· · · · · · · · · · · · · · · · · · · | де 3 |
| CHD30 and CHD30Front Panel & Related Parts · · · · · · · · · · · · · · · · · · Pag | је 4 |
| Side, Back and Interior Panels · · · · · · · · · · · · · · · · · · · | ge 5 |
| Dispensing Components · · · · · · · · · · · · · · · · · · · | ge 6 |
| Ice Chute Mechanism · · · · · · · · · · · · · · · · · · · | ge 7 |
| Ice Catch Pan · · · · · · · · · · · · · Pag | ge 8 |
| Control Box · · · · · · · · · · · · · · · Pag | ge 9 |
| Wiring Diagram, 115 volt, 60 Hz Basic and Water Station · · · · · · · · · · · · · · · Page | ge 10 |
| Schematic Diagram, Basic and Water Station Models · · · · · · · · · · · · · · · · Pag | ge 11 |
| Wiring Diagram, 230 volt, 50 Hz Basic · · · · · · · · · · · · · · · · · · · | ge 12 |
| Wiring Diagram for Coin Mechanism Model· · · · · · · · · · · · · · · · · · · | ge 13 |
| Schematic Diagram for Coin Mechanism Model · · · · · · · · · · · · · · · · · · · | ge 14 |

Website: www.cornelius.com

Telephone Number


800-238-3600 All Departments

Front and Top Panels

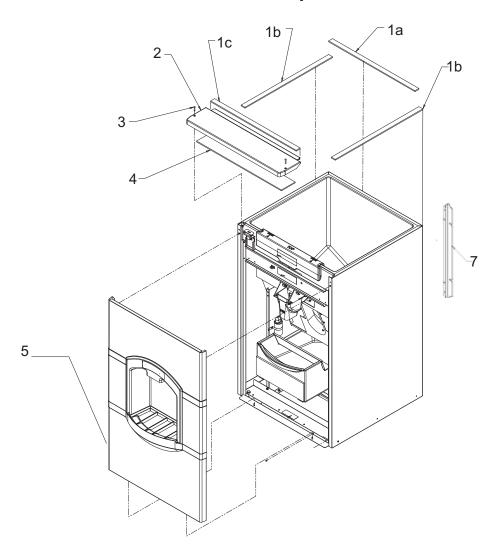

| Item | Part | | 5 | See Page 3 | CHD30B front panel |
|--------|---------------|---------------------------|---|------------|---------------------------------|
| Number | Number | Description | | See Page 3 | CHD30N front panel |
| 1 | 620204172 | Gasket tape, order by ft. | | See Page 3 | CHD22 front panel |
| 1a | Use 27.5" for | CHD30, 19.5" for HD22 | | | |
| 1b | Use 27.88" | | 6 | 620204202 | Ice Deflector 30 inch wide only |
| 1c | Use 27.25" fo | r CHD30, 19.25" for HD22 | | | (NOT SHOWN) |
| 2 | 620204214 | CHD30 top panel | | | (1101 3110 1111) |
| | 620204215 | CHD22 top panel | 7 | 620204730 | 30" mounting bracket |
| 3 | 620204229 | Top panel screw | , | 620204192 | 22" mounting bracket |
| 4 | 620204216 | CHD30 panel insulation | | 020204192 | 22 mounting bracket |
| | 620204217 | CHD22 panel insulation | 8 | 620204931 | Legs (4 ea) |

CHD30B & CHD22B Front Panel

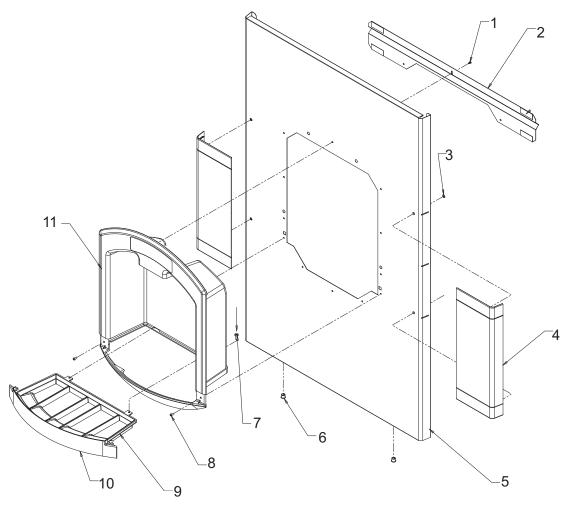


| Item | Part | |
|--------|------------------------|--|
| Number | Number | Description |
| 1 | 620204231 | Screw |
| 2 | 620204188 | CHD30 stiffener |
| | 620204189 | CHD22 stiffener |
| 3 | 620204224 | Retainer |
| 4 | 620204209 620204210 | CHD30 side flange CHD22 side flange |
| 5 | 620204712 | CHD30 Front panel* |
| | 620204713 | CHD22 Front panel* |
| 6 | 620204237 | Snap bushing |
| 7 | 620204222 | Screw |
| 8 | 620204720 | Screw |
| 9 | 620204269 | Foam gasket, 6" per side |
| 10 | 620204208 | Grill |

| Item | Part | |
|--------|-----------|--|
| Number | Number | Description |
| 11a | 620204207 | CHD22, CHD30, CHD30 dispense housing |
| 11b | 620204715 | CHD30 dispense housing |


^{*} includes items 1 thru 4

CHD30N and CHD30W Front Panel & Related Parts

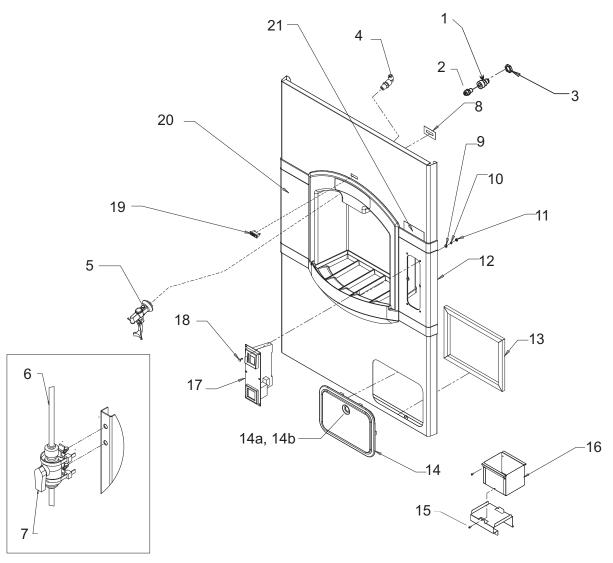


| Item Number | Part Number | Description | 12 | 620204719 | Right side flange for coin mech model |
|----------------|----------------|-------------------------|-----|-----------|---------------------------------------|
| 1 | 620204261 | Water inlet fitting | 13 | 620204173 | Door shim |
| 2 | 620204261 | · · | 14 | 620204247 | Door and lock |
| | | Straight connector | 14a | 620204251 | Lock and key |
| 3 | 620204221 | Pal nut | 14b | 620204252 | Key |
| 4 | 620204264 | Male elbow connector | 15 | 620204720 | Coin box screw |
| 5 | 620204213 | Water faucet | | | |
| 6 | 620204258 | Tubing, order per ft | 16 | 620204195 | Coin box |
| 7 | 620204265 | Shut off valve | 17 | 620204249 | Coin mechanism |
| 8 | 620204200 | Indicator light backing | | 620204250 | Coin switch |
| 9 | 620204716 | Washer for coin mech | 18 | 620204248 | Mounting screw |
| | | | 19 | 620204255 | Ready light |
| 10 | 620204717 | Lockwasher | | | , , |
| 11 | 620204718 | Hex nut (8-32) | 20 | 620204731 | CHD30 left side flange |
| | | | 21 | 620204266 | Coin mech label |

Side, Back and Interior Panels

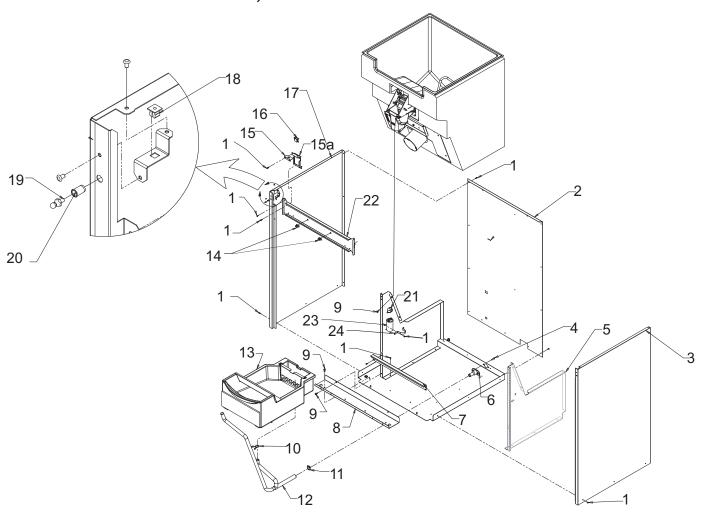


| Item | Part | | 12 | 620204211 | Drain hose |
|--------|---------------------|-------------------------------|-----|-----------|---|
| Number | Number | Description | 13 | 620204274 | Drain pan, assembled |
| 1 | 620204720 | Screw | 14 | 620204176 | Wire clamp (coin mech) |
| 2 | 620204279 | CHD30 back panel | 15 | 620204194 | Switch plate top |
| | 620204203 | HD22 back panel | 15a | 620204193 | Switch plate |
| 3 | 620204278 | Right side panel, | 16 | 620204722 | Switch, interlock |
| 4 | includ 620204220 | es mounting hardware Screw | 17 | 620204271 | Left side panel, includes mounting hardware |
| 5 | 620204281 | Bin support, right | 18 | 620204230 | Plastic nut |
| 6 | 620204280 | Bin support, left | 19 | 620204227 | Strike (ball stud) |
| 6 | 620204178 | Drain fitting | 20 | 620204228 | Insert |
| 7 | 620204187 | Catch pan support | 21 | 620204257 | Terminal cover |
| 8 | 620204190 | CHD30 base stiffener | 22 | 620204183 | CHD30 support bracket |
| | 620204191 | CHD22 base stiffener | | 620204184 | CHD22 support bracket |
| 9 | 620204721 | Screw | 23 | 620204267 | Motor capacitor |
| 10 | 620204179 | Hose clamp | 24 | 620204270 | Strap |
| 11 | 620204175 | Hose clamp | | | |

Dispensing Components

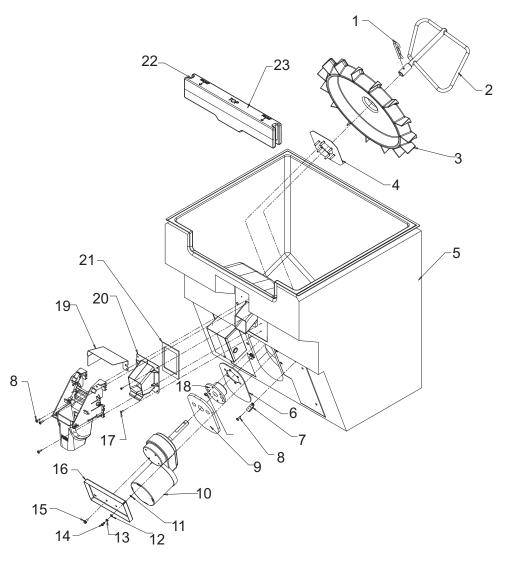


| ltom | Dout | | 11 | 620204725 | Retainer |
|--------|-----------|-------------------------------------|----|-----------|---------------------|
| ltem | Part | | 11 | 020204723 | Retainer |
| Number | Number | Description | 12 | 620204226 | Cupped washer |
| 1 | 620204232 | Hitch pin | 13 | 620204225 | Spring |
| 2 | 620204212 | Sweep arm | 14 | 620204233 | 1/4 turn stud |
| 3 | 620204723 | Dispense rotor | 15 | 620204721 | Screw |
| 4 | 620204732 | Hub plate | 16 | 620204186 | Mounting plate |
| 5 | 620204272 | CHD30 bin assembly | 17 | 620204720 | Screw |
| | 620204273 | CHD22 bin assembly | 18 | 620204733 | Hub |
| 6 | 620204260 | Insulation pad | 19 | 620204196 | Switch guard |
| 7 | 620204235 | Loop clamp | 20 | 620204201 | Spout |
| 8 | 620204724 | Screw | 21 | 620204219 | Gasket |
| 9 | 620204259 | Insulation for hub | 22 | 620204268 | Gasket, 4" each end |
| 10 | 620204253 | Dispense gearmotor, dual voltage | 23 | 620204185 | Bin door |

Ice Chute Mechanism

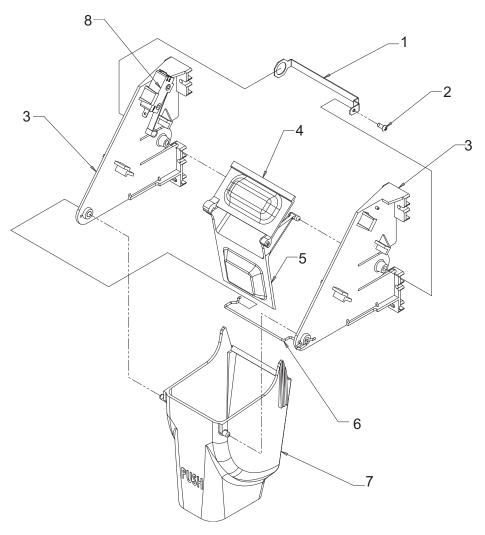


| Item | Part | |
|--------|-----------|----------------|
| Number | Number | Description |
| 1 | 620204199 | Clip |
| 2 | 620204720 | Screw |
| 3 | 620204192 | Bracket |
| 4 | 620204182 | Door lock |
| 5 | 620204181 | Door |
| 6 | 620204206 | Wire |
| 7 | 620204180 | Dispense chute |
| 8 | 620204240 | Vend switch |

Ice Catch Pan

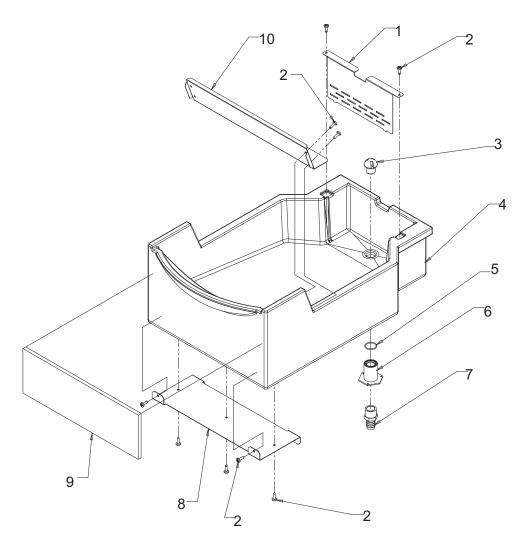


| Item | Part | |
|--------|-----------|----------------------------|
| Number | Number | Description |
| 1 | 620204283 | Screen |
| 2 | 620204726 | Screw |
| 3 | 620204174 | Drain top |
| 4 | 620204727 | Complete assembly as shown |
| 5 | 620204256 | O-ring |
| 6 | 620204177 | Drain bottom |
| 7 | 620204263 | Drain fitting |
| 8 | 620204198 | Drain pan bracket |
| 9 | 620204218 | Foam pad |
| 10 | 620204197 | Drain guard |



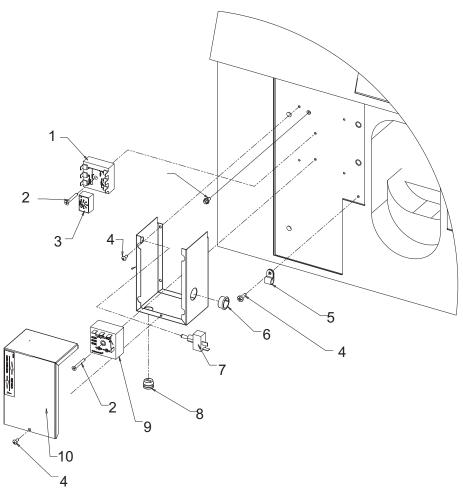


| Item | Part | | Not show | n | |
|--------|-----------|-----------------------|----------|-----------|----------------------|
| Number | Number | Description | 11 | 620204241 | 60 Hz harness, basic |
| 1 | 620204244 | Coin mech timer | | | and water |
| 2 | 620204223 | Screw | | 620204246 | Coin mech harness |
| 3 | 620204245 | Adjustment module | | 620204254 | 50 Hz harness |
| 4 | 620204720 | Screw | 12 | 620204239 | 115 volt power cord |
| 5 | 620204234 | Loop clamp | | 620204238 | 230 volt power cord |
| 6 | 620204728 | Snap bushing | | | |
| 7 | 620204729 | Free vend switch | | | |
| 8 | 620204236 | Strain relief | | | |
| 9 | 620204242 | 60 Hz off cycle timer | | | |
| | 620204243 | 50 Hz off cycle timer | | | |
| 10 | 620204282 | Control box cover | | | |

Wiring Diagram, 115 volt, 60 Hz Basic and Water Station

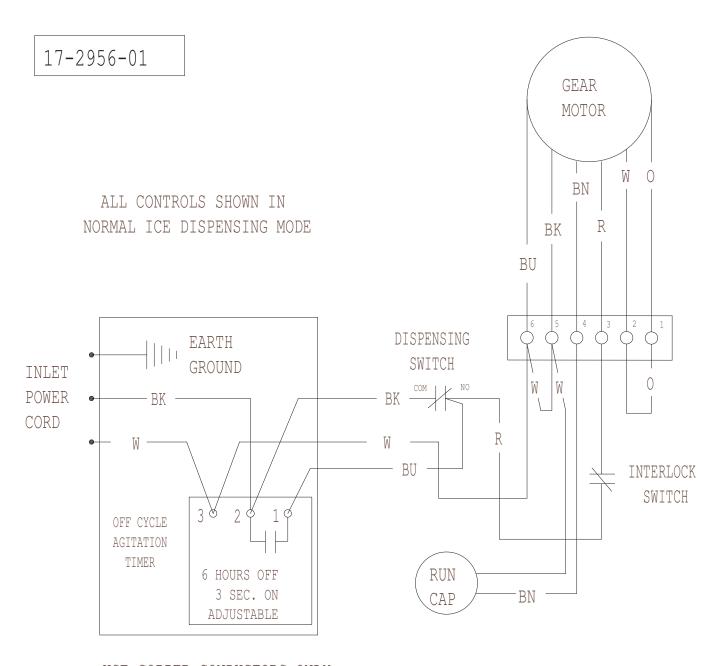


USE COPPER CONDUCTORS ONLY

Schematic Diagram, Basic and Water Station Models

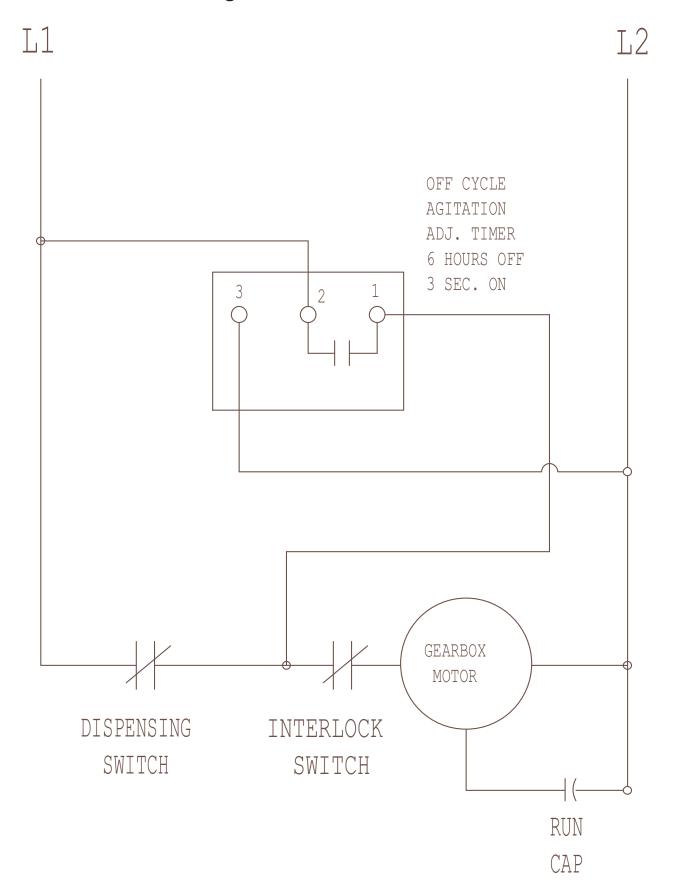


Wiring Diagram, 230 volt, 50 Hz Basic

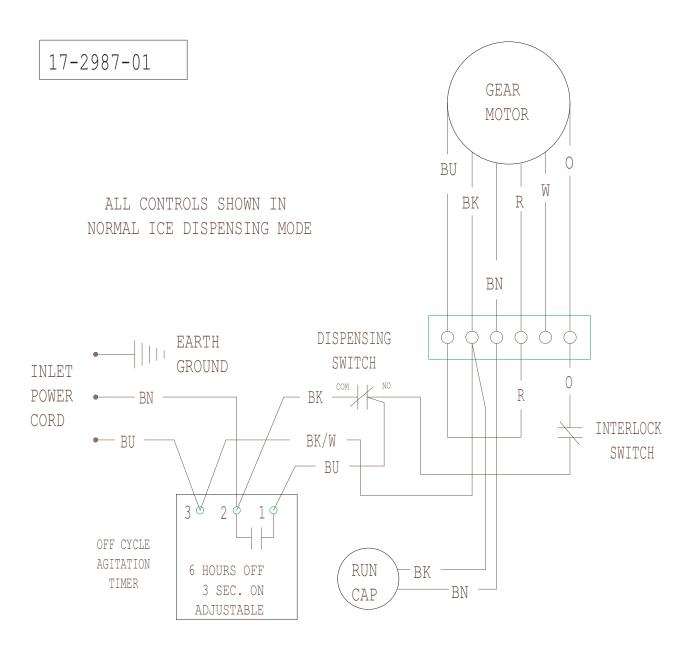


USE COPPER CONDUCTORS ONLY

Wiring Diagram for Coin Mechanism Model

17-2967-01

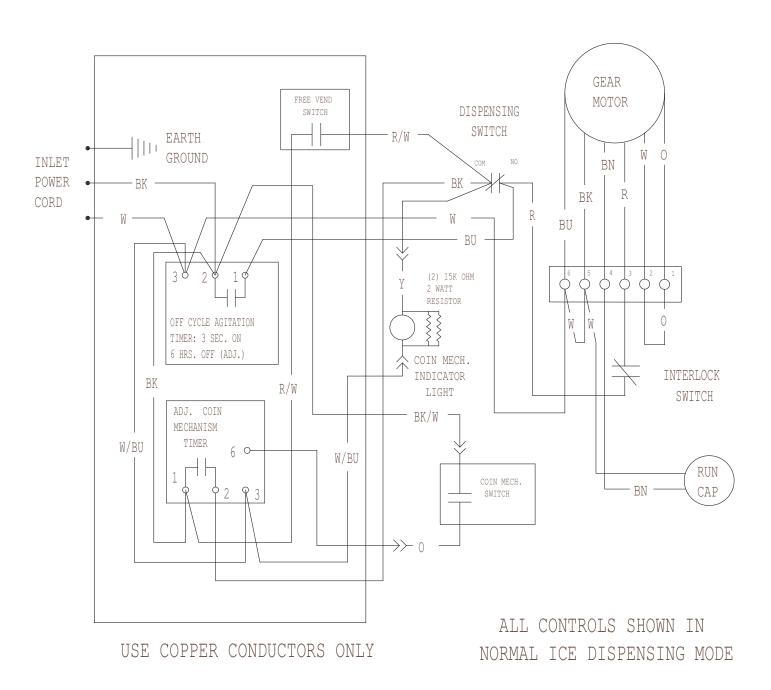

Schematic Diagram for Coin Mechanism Model

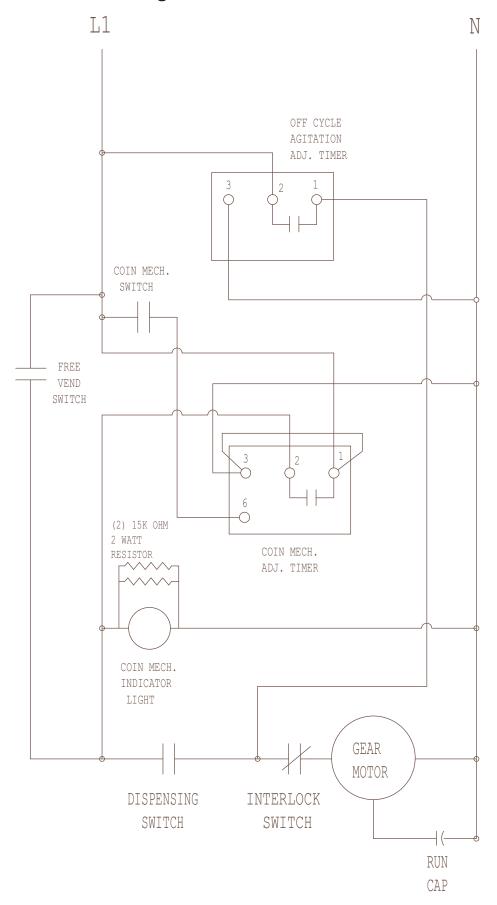

Page 14 9081370-02